



Installation Instructions - JLT Cold Air Intake 2011-2020 Jeep Grand Cherokee & Dodge Durango 5.7 #CAI-DJ57-11

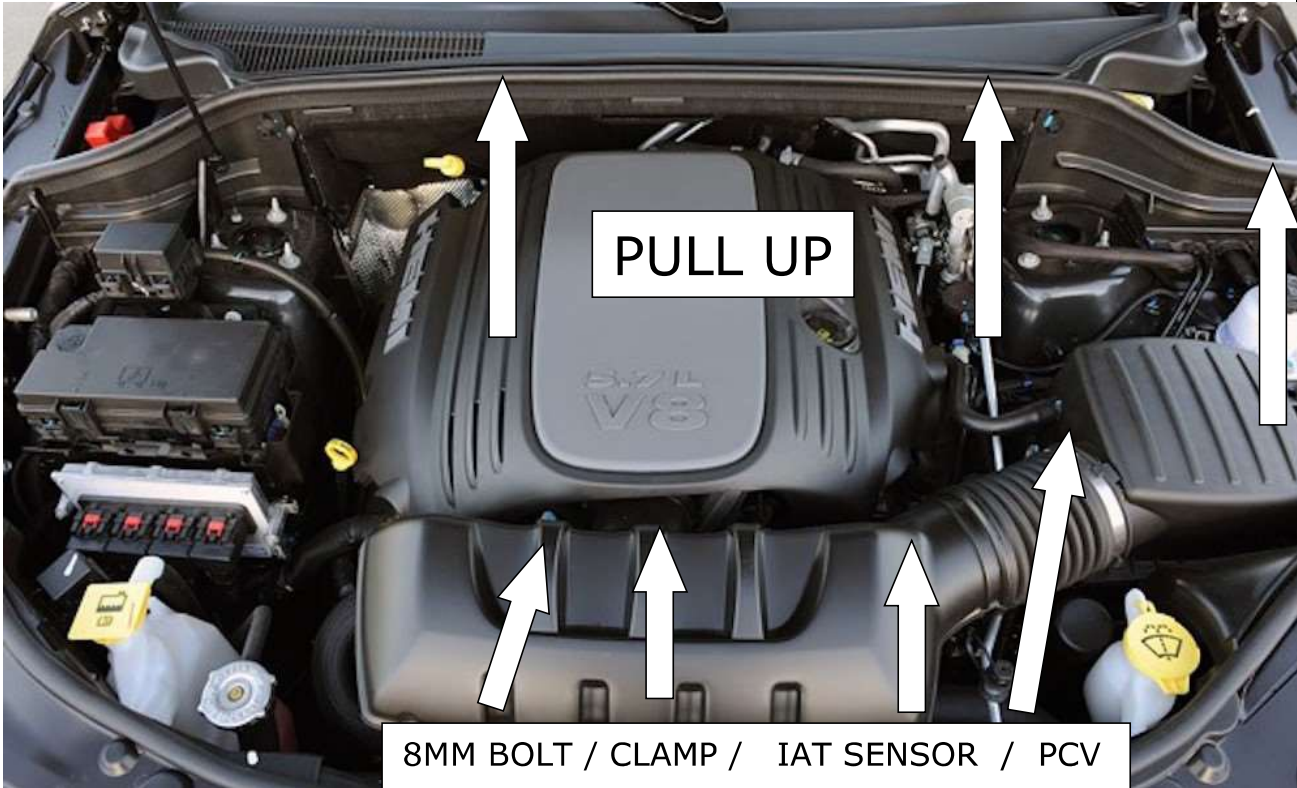

Thank you for purchasing our product. We hope you are satisfied with the look and performance. If you have any questions, please feel free to call us first before going to the internet. Take your time and it will be a smooth install.

Please review complete instructions prior to installing.

We find it easiest to install the kit as a complete assembly; however, it can be done one piece at a time. Here is a walk through:

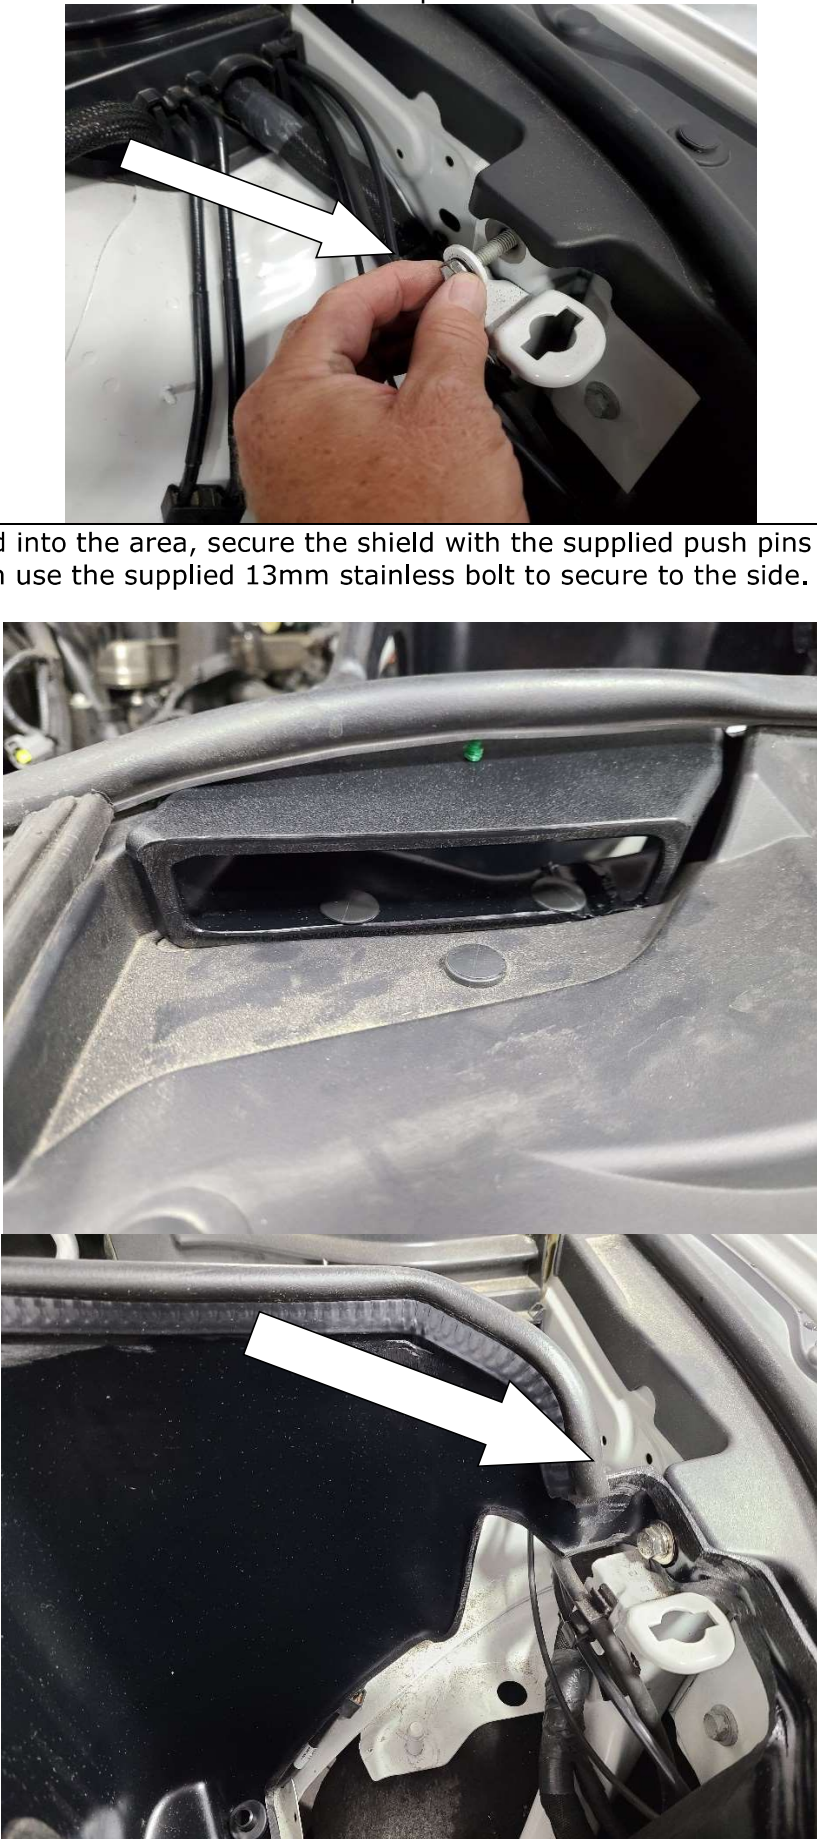Step #	
1	Verify you have all of the following parts included in the kit: (1) JLT Intake Tube with PCV fitting and IAT grommet, (1) 4"-3.5" Rubber Elbow, (1) 5"x7" Air Filter, (1) JLT Heat Shield, (1) 64 Clamp, (1) 56 Clamp, (1) 13mm stainless bolt, (2) Push Pins, (1) Rain Shield for use with 2019+ SRT Durango hood
2	Gather all of the following tools needed for the installation: 5/16 Nut Driver, Flat screwdriver, pry tool, 13mm Socket, 10mm socket and Ratchet
3	Remove the stock intake from the throttle body to the airbox. Lift up on engine cover to remove. Loosen clamp at the throttle body. Remove 8mm bolt in front of throttle body. Unplug IAT sensor and PCV line. PULL UP on airbox and remove from the vehicle.
 <p style="text-align: center;">PULL UP</p> <p style="text-align: center;">8MM BOLT / CLAMP / IAT SENSOR / PCV</p>	

4	Remove the IAT sensor from the stock tube by turning counterclockwise.	
5	Remove the 13mm bolt in the driver side apron panel.	
6	<p>Lower heat shield into the area, secure the shield with the supplied push pins in the front scoop FIRST then use the supplied 13mm stainless bolt to secure to the side.</p> 	

7	Lower air filter down into the airbox first, then with the 90° rubber elbow on the tube with clamps loose, connect the tube and air filter then slide onto throttle body.
8	Adjust the filter and tube position for best fit and tighten all clamps.
9	Plug in IAT sensor, PCV connection and weather strip in hole on air scoop of heat shield.
10	<p>Install engine cover and you are done!</p> 
11	<p>2019 SRT Style Hood Owners: Install supplied rain shield as shown</p> 



Oil Filter: The frequency you should clean your filter will depend on your driving conditions. It is recommended to check your filter at every oil change or 3,000 miles. If there is a buildup of dirt as thick as the wire mesh, then it's time to clean your filter.

To properly clean your oil filter, we recommend the S&B Precision Cleaning & Oiling Kit (located in the Parts Sold Separately Section of our website, www.JLTtruecoldair.com).

Thanks for the business. If you have any questions, please e-mail info@JLTtruecoldair.com or call 757-335-1940. Our hours are Monday-Friday, 8:00am – 5:00pm Eastern Time.

JLT Performance Lifetime Satisfaction Guarantee. We want you to be a JLT Performance customer for life! Your new JLT Performance product is warranted to be free from defects in materials and workmanship for the life of the *original retail purchaser*, subject to the limitations contained in our warranty found here. www.jlttruecoldair.com/warranty

We guarantee workmanship, tunability and even a pathway to discounted upgrades for substantially improved items.

Return Policy: All returns will be subject to a 10%-25% restocking fee. Air Filters will not be accepted for return unless they are in original plastic sealed bag. Please visit www.JLTtruecoldair.com for complete return policy.

Disclaimer: JLT Performance Inc. makes no warranties whatsoever, expressed or implied, oral or written to any purchasers, except the warranty above. JLT Performance Inc. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by JLT Performance Inc. agree to hold harmless and indemnify JLT Performance Inc. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to JLT Performance Inc. for any claims arising out of use of its products.